



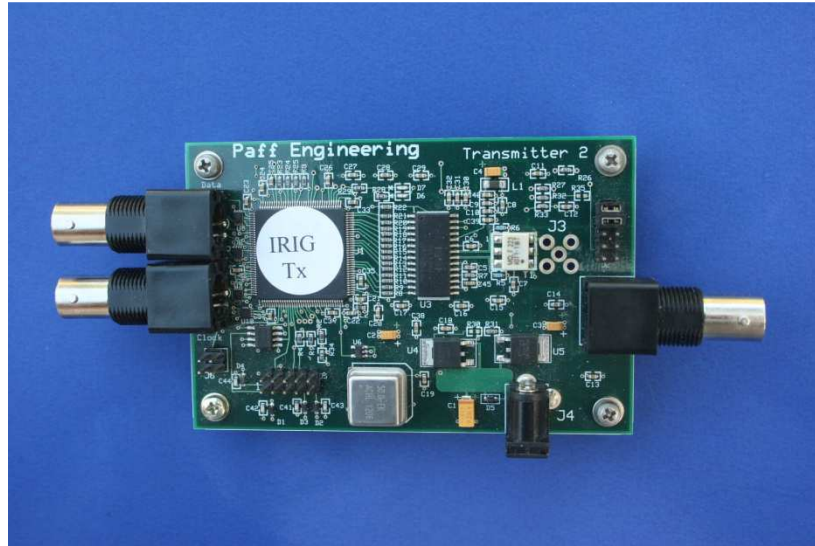


Features

- Accepts external TTL clock and data
- Operates down to 2 Kbps
- Provides either 50 MHz or 70MHz output
- Optional Randomizer
- DAC clocks at 160 MHz (image at either 90 or 110 MHz)
- Conforms to IRIG standard
- Verilog code adaptable to different requirements

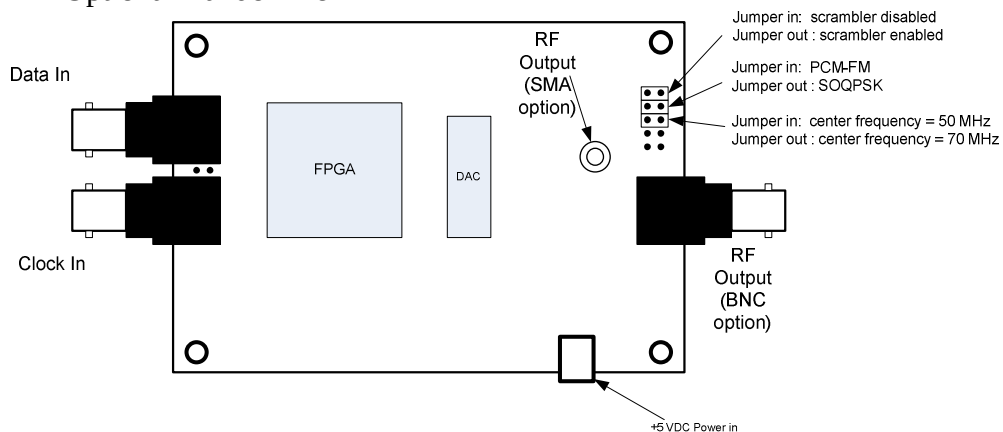

SOQPSK Spectrum

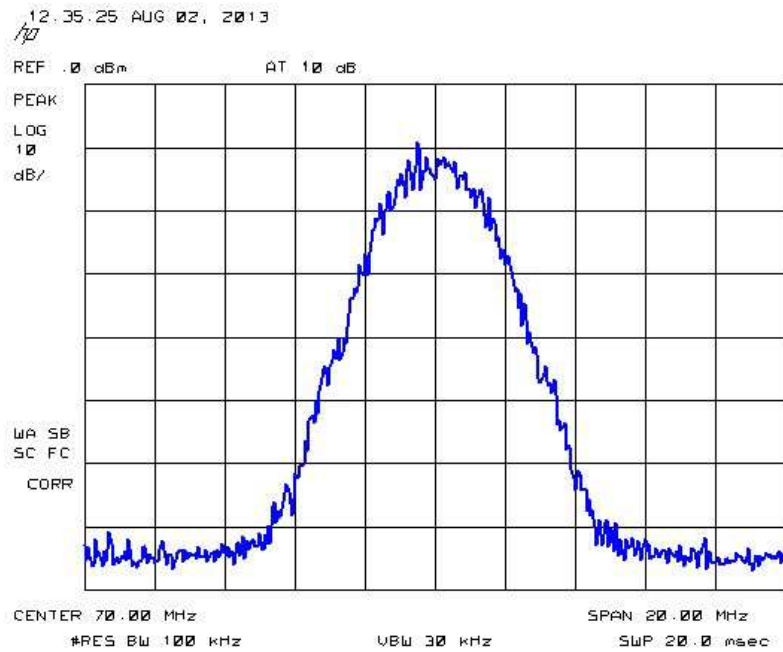

PCM-FM Spectrum

